


## 30° Lateral

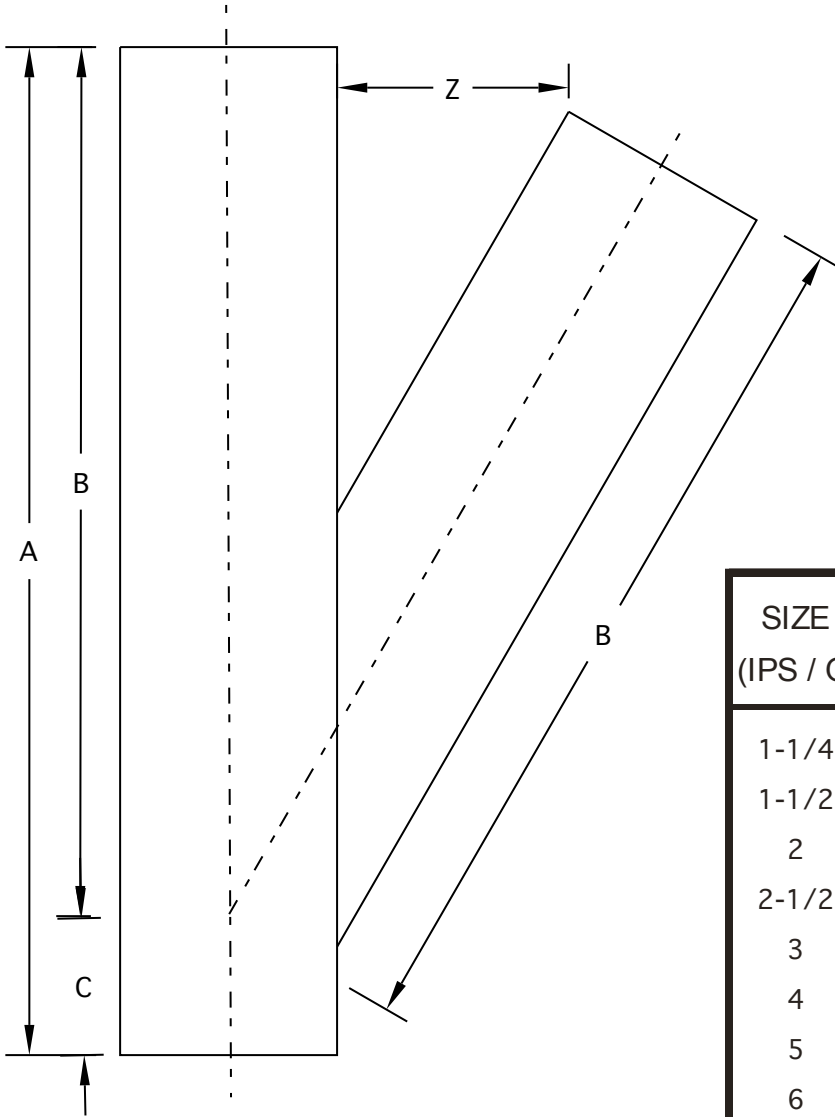

Run and branch are longer (than 45° lateral) to maintain approx 5" span on most sizes at Dimension 'Z' to accommodate field welding.

SIZE (IPS / OD)	DIMENSIONS		
	A	B	C
1-1/4	<i>same dimensions as 1-1/2"</i>		
1-1/2	13	11	2
2	15	12-1/2	2-1/2
2-1/2	<i>same dimensions as 3"</i>		
3	19	16	3
4	21	18	3
5	24	20-1/2	3-1/2
6	25-1/2	22	3-1/2
8	31-1/2	27	4-1/2
10	35	30	5
12	39-1/2	34	5-1/2

- Manufactured to the specs and tolerances of ASTM A774.
- Reducing laterals follow the same dimensions as straight laterals.
- Custom dimensions available upon request.
- 45° or 60° Laterals also available.
- Available in 304L, 316L, 317L, carbon steel, or other materials upon request.
- Available ends include buttweld, beveled, grooved, flanged, or Van Stone.